


LC 4B



OIL-LUBRICATED ROTARY VANE VACUUM PUMP

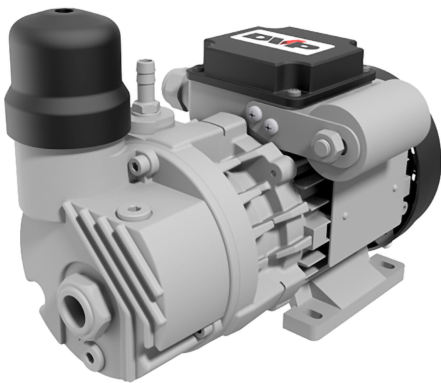

TECHNICAL DATA

		LC 4B	
Part number		9601077	
Frequency	Hz	50	60
Nominal flow rate	m³/h	4	4,8
Final total pressure	mbar (Abs)	30	
Continuous operating range	mbar (Abs)	400 ÷ 30	
Maximum inlet air temperature	°C	40	
Oil type		SW40	
Oil capacity	dm³	0,065	
Noise level (UNI EN ISO 2151±3dB)	dB(A)	48	52
Weight	kg	5,4	

CURVES

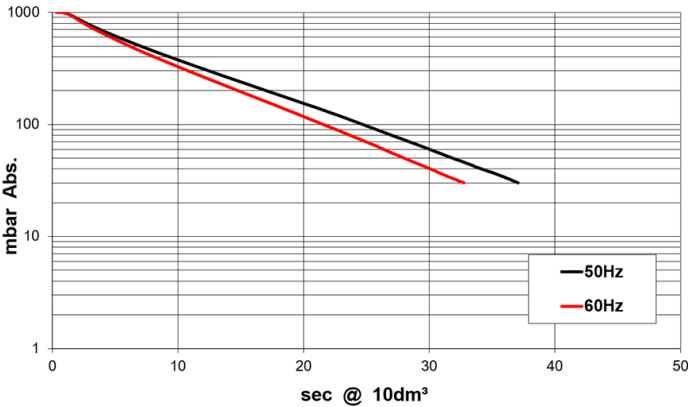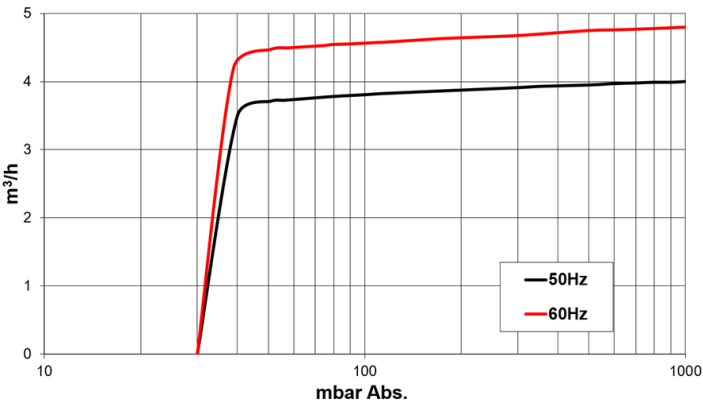


NOTE: Curves refer to suction pressure and temperature of 20°C (tolerance ±10%)

LC 4B

OIL-LUBRICATED ROTARY VANE VACUUM PUMP

DIMENSIONS

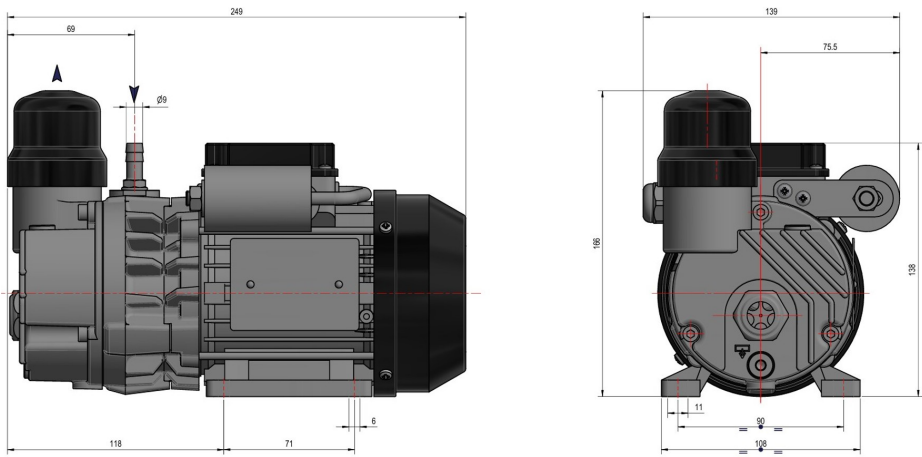


MOTORS

LC 4B [1 Phase]						
ID	POWER [kW]	VOLTAGE [V]	FREQUENCY [Hz]	EFFICIENCY	RPM	Notes
MA	0,12	220-240	50	////	2800	S3 75%
	0,15		60		3300	
LC 4B [3 Phase]						
TN	0.12	Δ175-260 / Y300-450	50	IE2	2800	
	0,15	Δ200-300 / Y346-520	60		3300	

16/04/2026 Subject to change without notice

LC 4B

OIL-LUBRICATED ROTARY VANE VACUUM PUMP

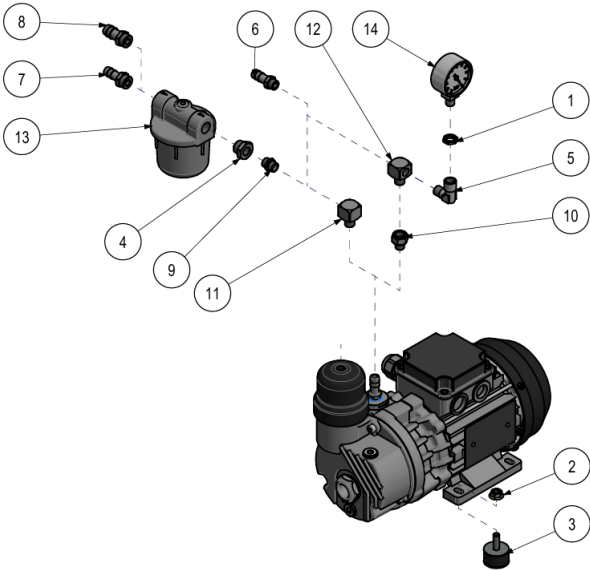

ACCESSORIES

		PART NUMBER
1	Nut	0202001
2	Nut	4 x 0204005
3	Anti-vibration mount	4 x 1503005
4	Reducer	2001012
5	Elbow fitting	2101001
6	Hose barb fitting ATG	2103003 (Ø9)
7	Hose barb fitting ATG	2103004 (Ø9)
8	Hose barb fitting ATG	2103006 (Ø12)
9	Nipples	2201005
10	Nipples	2202007
11	Fitting	4101024
12	Fitting	4101025
13	Cartridge Filter	9001004
14	VMR Vacuum Gauge	9009004

16/04/2026 Subject to change without notice