

MD 10 (MY24)



OIL-LUBRICATED ROTARY VANE VACUUM PUMP



TECHNICAL DATA

		MD 10	
Part number		9601075	
Frequency	Hz	50	60
Nominal flow rate	m³/h	10	12
Final total pressure	mbar (Abs)	2	
Maximum inlet air temperature	°C	40	
Oil type		SW 40	
Oil capacity (Min - Max)	dm³	0,4	
Noise level (UNI EN ISO 2151±3dB)	dB(A)	59	62
Weight	kg	14,5	

CURVES

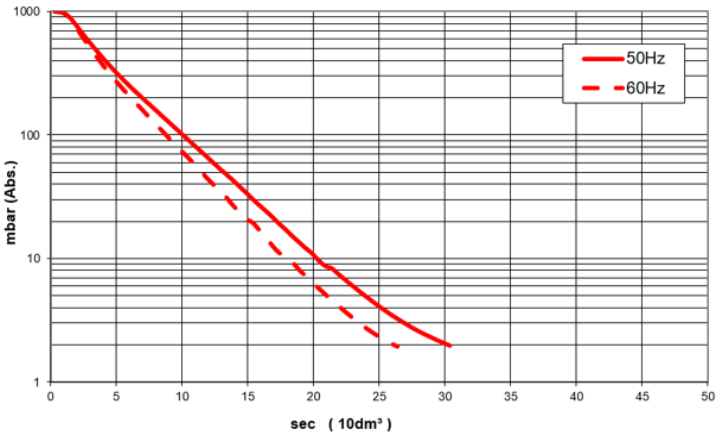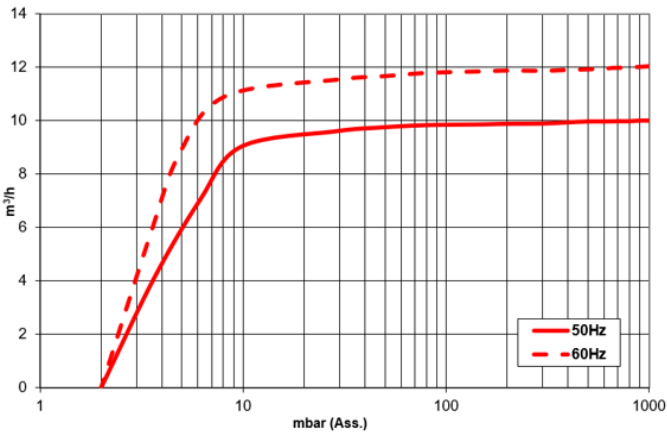


NOTE: Curves refer to suction pressure and temperature of 20°C (tolerance ±10%)



MD 10 (MY24)

OIL-LUBRICATED ROTARY VANE VACUUM PUMP

DIMENSIONS

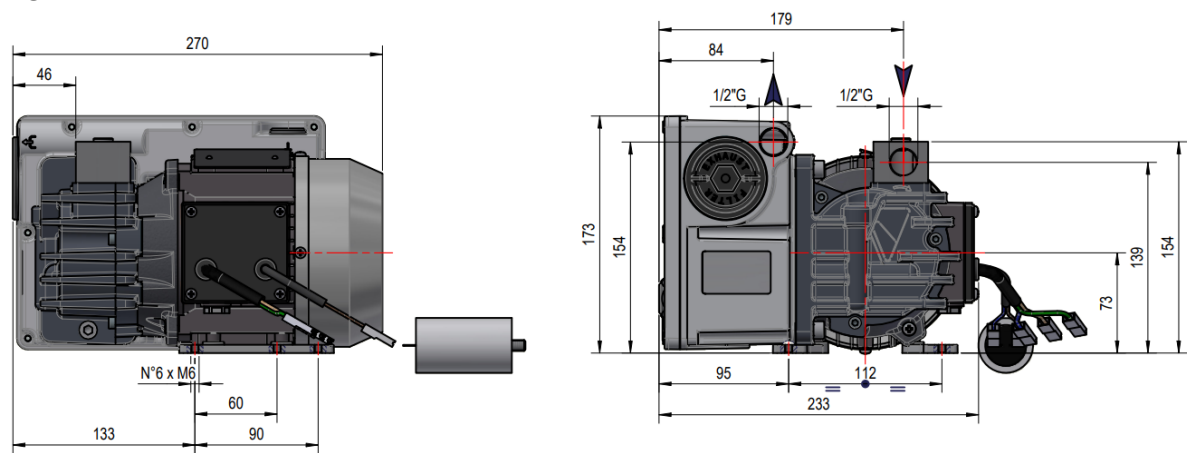


MOTORS

MD 10 [1 phase]						
ID	POWER [kW]	VOLTAGE [V]	FREQUENCY [Hz]	EFFICIENCY	RPM	Notes
MW	0,37	230 V	50	///	2800	S3 75%
MX	0,45	110 - 115 V	60	///	3300	S3 75% - UL
MN	0,37	100 V	50	///	2800	S3 75%
	0,45		60		3300	
MD 10 [3 phase]						
TN	0,37	Δ 175-260 / Y300-450 V	50	///	2800	S3 75%
	0,45	Δ 200-300 / Y346-520 V	60		3300	

MD 10 (MY24)

OIL-LUBRICATED ROTARY VANE VACUUM PUMP

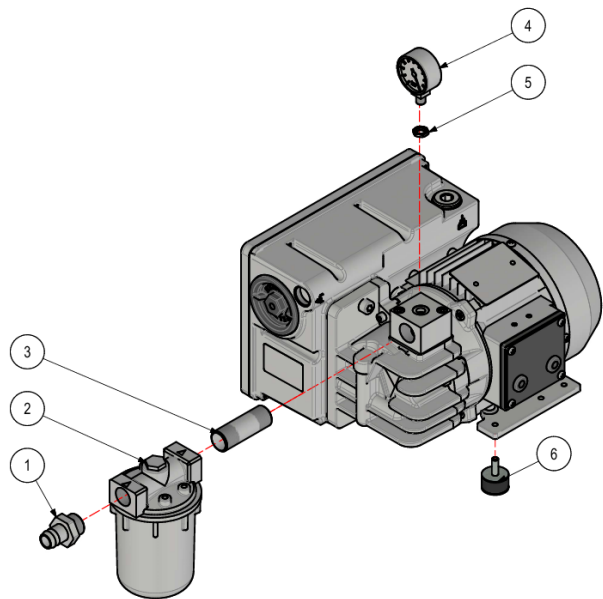

ACCESSORIES

		PART NUMBER
1	ATV hose barb fitting	2103010
2	FCT Filtre	9001010
3	Fitting	5001003
4	VMR Vacuum Gauge	9009004
5	Nut	0202001
6	Shock mounts AVB	1503005

19/06/2026 08:59 Subject to change without notice