

MD 16 (MY24)



Pompa rotativa a palette lubrificata



TECHNICAL DATA

		MD 16	
Code		9601076	
Frequency	Hz	50	60
Nominal capacity	m³/h	16	19
Final total pressure	mbar (Abs)	2	
Maximum inlet air temperature	°C	40	
Oil type		SW 40	
Oil capacity (Min - Max)	dm³	0,4	
Noise level (UNI EN ISO 2151±3dB)	dB(A)	60	64
Weight	kg	16	

CURVES

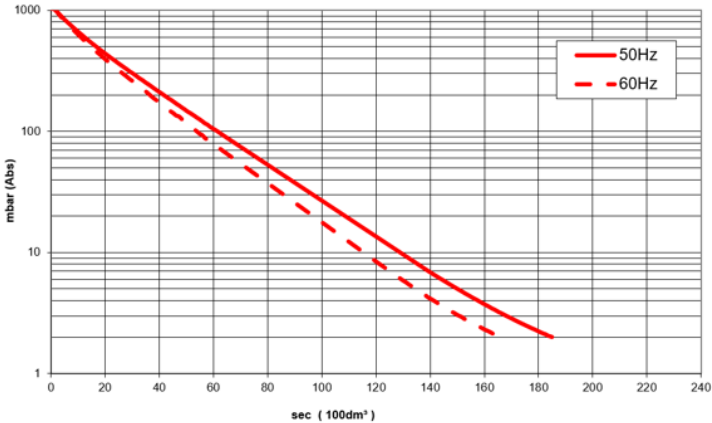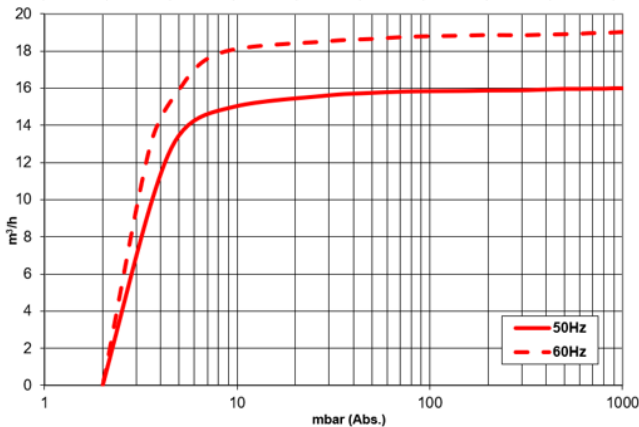


NOTE: Curves refer to suction pressure and temperature of 20°C (tolerance ±10%)

MD 16 (MY24)

Pompa rotativa a palette lubrificata

DIMENSIONS

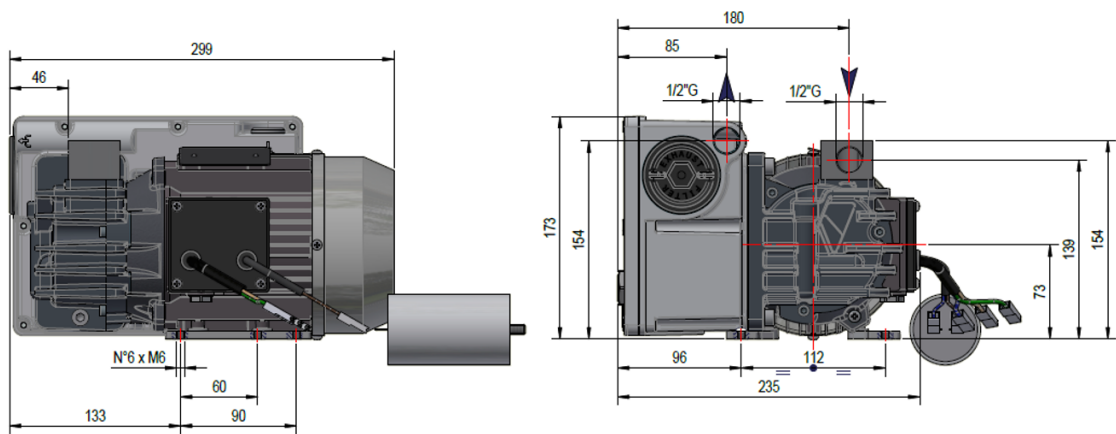

MOTORS

MD 16 [1 phase]

ID	POWER [kW]	VOLTAGE	FREQUENCY	EFFICIENCY	RPM	
MR	0,55 0,66	230 V	50 60	///	2800 3300	S3 75%
MX	0,66	110 - 115 V	60	///	3300	S3 75% - UL
MN	0,55 0,66	100 V	50 60	///	2800 3300	S3 75%


MD 16 [3 phase]

TX	0,55 0,66	Δ 230 / Y400 V Δ 265 / Y460 V	50 60	IE2	2800 3300	
----	--------------	----------------------------------	----------	-----	--------------	--

Subject to change without notice

MD 16 (MY24)

Pompa rotativa a palette lubrificata

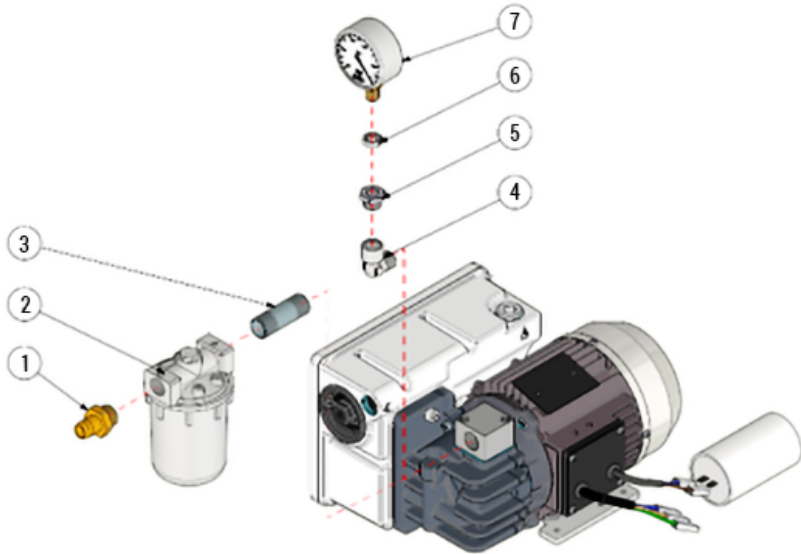

ACCESSORIES

		CODE
1		2103010
2	FCT Filtre	9001010
3	Fitting	5001003
4	Elbow fitting	2101008
5	Fitting	2001008
6	Nut	0202002
7	VMR Vacuum Gauge	9009009

Subject to change without notice